


ELEVAH® 50F



A roomy platform which is easy to manoeuvre (max thrust required: 5 kg), which enables working at heights of up to 5 m.

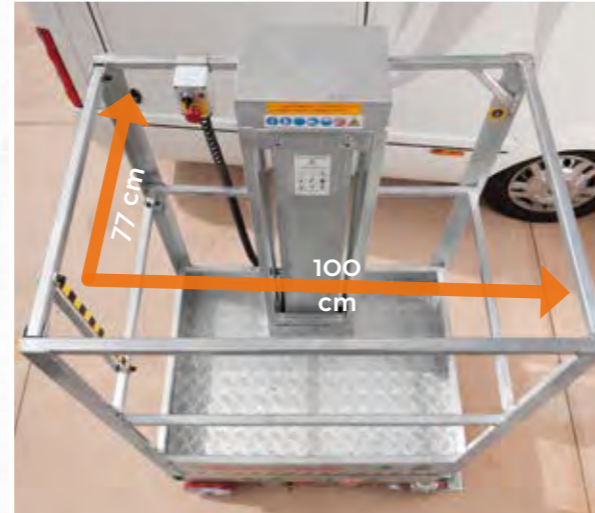

ULTRACOMPACT

The basket is in the shape of the base cage so making the most of the space.



REMOVABLE CONTROL

This allows the platform to be operated from the ground as well.

The platform rises automatically to a working height of up to 3.8 m when used without stabilizers, thanks to sensors that detect the height of the basket.



SOME ACCESSORIES AND CUSTOMISATION




PEVA: EVA protection for the Basket.

OTHER ACCESSORIES AND CUSTOMISATION ON P. 46



TECHNICAL DATA

		Without Stabilizers	With Stabilizers
Max. working height		3,80 m	5,10 m
Max capacity		200 kg	
Number of people		1	
Use		internal	
A	Closed machine height	1700 mm	
B	Minimum platform height	430 mm	
C	Maximum platform height	1800 mm	3100 mm
D/E	Base overall dimensions	1000x770 mm	1110x1250 mm
F/G	Cage dimensions	1000x700 mm	
H/I	Max. distance from the wall	0 mm	275x60 mm
Machine weight		240 kg	
Drive wheels dimension		Ø 200 x 50	
Swivel wheels dimensions		Ø 150 x 45	
Velocità massima (salita - discesa)		0,15 m/s	
Manual force to move it (at the start - in motion)		7 - 3 kg	
J	Maximum pressure for wheel at full load*	1,48 kN	-
	Maximum pressure for stabilizer at full load*	-	1,54 kN
Work cycles** (con batterie cariche)		Ca. 300	-

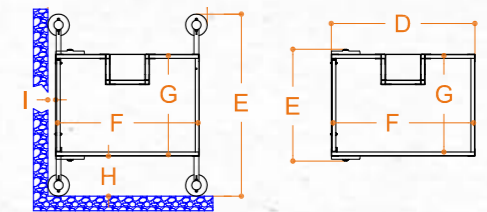

ALIMENTAZIONE	Opzione 1	Opzione 2
Batterie	2 Pb Acido - 12 V 105 Ah	220V 50/60Hz
Battery charger	110V - 220V	-

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** It refers to the version with batteries. By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height.

