


# ELEVAH<sup>®</sup> 80 and 65 MOVE picking

ELEVAH 80 and 65 MOVE PICKING

STOCK PICKERS

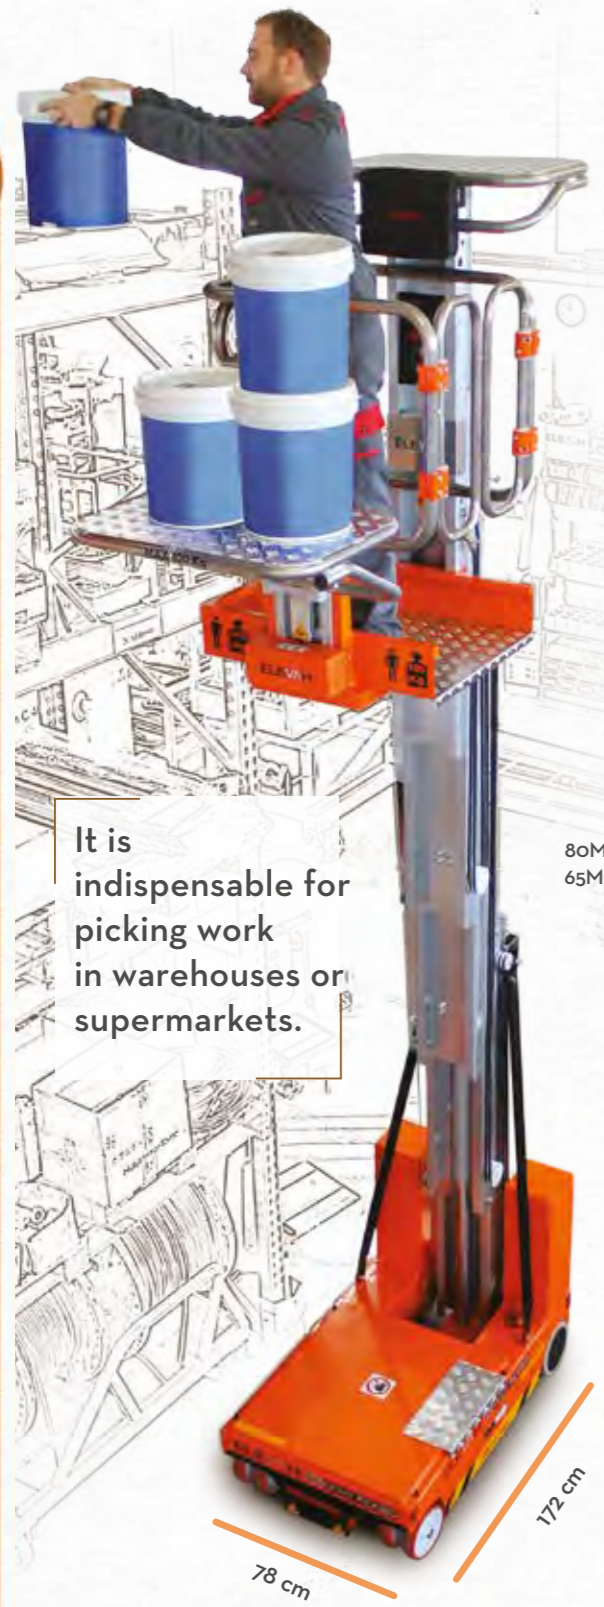

It is indispensable for picking work in warehouses or supermarkets.

80MP: 5,75 m  
65MP: 4,70 m

Stock pickers to reach 7,75 m and 6,65 m working height. The right solution for picking activities up to 100 kg capacity. It permits to use the max height of your warehouse as well as optimising the costs. Restrained weight, minimum footprint and an incredible manoeuvrability enable to these equipment to move around easily even in very small spaces.



### MAXIMUM COMFORT

Thanks to the reach of the electric picking platform and the extremely ergonomic workstation, the picking of products can be done easily and in comfort.



- Side entrance with sensors which stop the cage opening.
- Dual operator presence device.
- Anti-tilting device.
- Electronic slope monitoring.
- Overload monitoring.



80MP 65MP

790 kg 720 kg 200 kg kg. 20

THE COLUMNS AND CAGE ARE OF ALUMINIUM



### SOME ACCESSORIES AND CUSTOMISATION



**PICK.PLE:** Certification of the machine following Aerial Platform norms.

OTHER ACCESSORIES AND CUSTOMISATION ON P. 46

They facilitate the operator's work, while ensuring the highest standards of safety.



### DOUBLE PICKING PLATFORM

In addition to the large electric platform, which is height adjustable with a maximum payload capacity of 100 kg, there is a large fixed platform.

### BLUE SPOT

Upper protection and signalling beacon. (See BLUE SPOT and BLUE SPOT1, p. 54)



ELEVAH 80 and 65 MOVE PICKING


STOCK PICKERS



# ELEVAH® 80 MOVE picking

## TECHNICAL DATA

<b>Max. working height</b>		7,75 m
<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		Internal - External
<b>A</b>	Closed machine height	1980 mm
<b>B</b>	Minimum platform height	590 mm
<b>C</b>	Maximum platform height	5750 mm
<b>D/E</b>	Base overall dimensions	1720 x 780 mm
<b>F/G</b>	Cage dimensions	630 x 780 mm
<b>Machine weight</b>		790 kg
<b>H/I</b>	Fixed picking tray dimensions	500 x 760 mm
<b>Fixed picking tray capacity</b>		20 kg
<b>Drive wheels dimension</b>		Ø 220 x 65
<b>Swivel wheels dimensions</b>		Ø 200 x 50



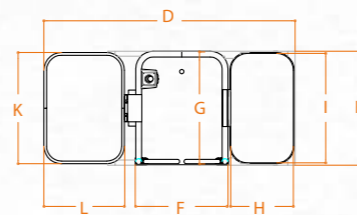


### PICKING PLATFORM

<b>Adjustment</b>		electrical
<b>J</b>	Stroke	660 mm
<b>Min. height from the ground</b>		1030 mm
<b>Maximum height from the ground</b>		6830 mm
<b>K/L</b>	Dimensions	550 x 760 mm
<b>Capacity</b>		100 kg

### PERFORMANCE


<b>Power supply</b>		electrical
<b>Batteries</b>		Lead-Acid Batteries 12V 105 Ah
<b>Battery charger</b>		110V - 220V
<b>M</b>	Maximum climbing ability	15%
<b>Climbing ability at height</b>		2,5%
<b>Internal turning radius</b>		0
<b>External turning radius</b>		1095 mm
<b>Max. speed (rising - descending)</b>		0,2 m/s
<b>Maximum shifting speed (on the ground - at height)</b>		1,0 - 0,22 m/s
<b>N</b>	Maximum pressure for wheel at full load*	3,50 kN
<b>Work cycles ** (with fresh batteries)</b>		Ca. 130

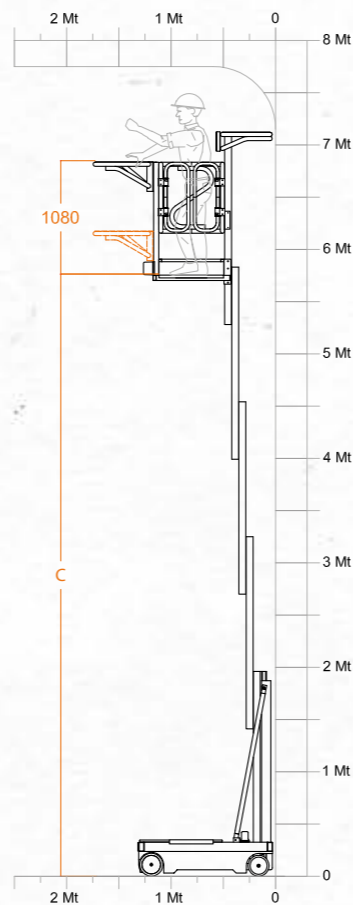

# ELEVAH® 65 MOVE picking

## Technical data

<b>Max. working height</b>		6,50 m
<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		Internal - External
<b>A</b>	Closed machine height	1720 mm
<b>B</b>	Minimum platform height	420 mm
<b>C</b>	Maximum platform height	4700 mm
<b>D/E</b>	Base overall dimensions	1720 x 780 mm
<b>F/G</b>	Cage dimensions	630 x 780 mm
<b>Machine weight</b>		720 kg
<b>H/I</b>	Fixed picking tray dimensions	460 x 760 mm
<b>Fixed picking tray capacity</b>		20 kg
<b>Drive wheels dimension</b>		Ø 220 x 65
<b>Swivel wheels dimensions</b>		Ø 200 x 50


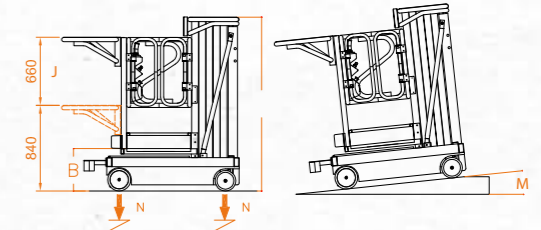


### PICKING PLATFORM

<b>Adjustment</b>		electrical
<b>J</b>	Stroke	660 mm
<b>Min. height from the ground</b>		840 mm
<b>Maximum height from the ground</b>		5750 mm
<b>K/L</b>	Dimensions	550 x 760 mm
<b>Capacity</b>		100 kg

### PERFORMANCE

<b>Power supply</b>		electrical
<b>Batteries</b>		Lead-Acid Batteries 12V 105 Ah
<b>Battery charger</b>		110V - 220V
<b>M</b>	Maximum climbing ability	15%
<b>Climbing ability at height</b>		2,5%
<b>Internal turning radius</b>		0
<b>External turning radius</b>		1095 mm
<b>Max. speed (rising - descending)</b>		0,2 m/s
<b>Maximum shifting speed (on the ground - at height)</b>		1 - 0,22 m/s
<b>N</b>	Maximum pressure for wheel at full load*	3,20 kN
<b>Work cycles ** (with fresh batteries)</b>		Ca. 130

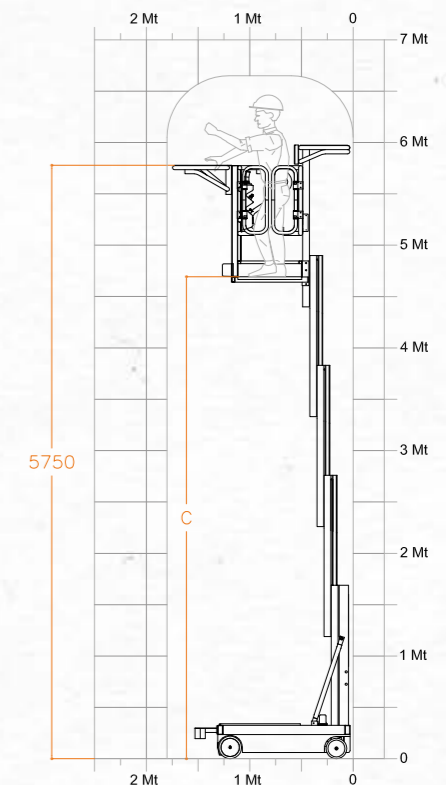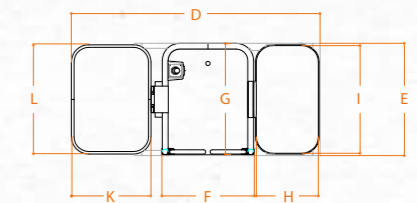

\*Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\*By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

\*Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\*By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.