

mod. **PKS 1200**

self-propelled movement at a maximum height of 12 m.
Approved for outdoor use with 2 operators and max capacity of 200 kg.



PKS 1200 PLATFORM WITH A COMPETITIVE PRICE, MAXIMUM HEIGHT AND REDUCED WEIGHT.

125 cm



98 cm




OPTIONAL hydraulic levelling.

max 20 cm

Technical data

Max capacity	200 kg	
Number of people	2	
Use	external	
A	Closed machine height	2450 mm
B	Min. height from the ground to the platform level	600 mm*
C	Max. height from the ground to the platform level	10200 mm
D	Base overall dimensions	1920 mm
E1		2150 mm
E2		2785 mm
F		980 mm
G	Cage dimensions	980 mm
H1		1200 mm
H2		1835 mm
Machine weight	2180 kg**	
Power supply	24 V	
N° 2 12V Acid Batteries	130 Ah	
Battery charger	110V - 220 V	
Climbing ability at height	1°-1,7%	
I	Max. climbing ability	15%
Drive wheels dimensions	Ø 240 x 100	
Swivel wheels dimensions	Ø 250 x 100	
Turning radius	1990 mm	
Max. rising speed	0,3 m/s	
Max. descending speed	0,2 m/s	
Max. shifting speed	1,25 m/s	
Max. shifting speed at height	0,12 m/s	
C1	Max. height of self-movement at a height with the extensible basket closed	6000 mm
J	Max. pressure for wheel at full load	8,4 kN***

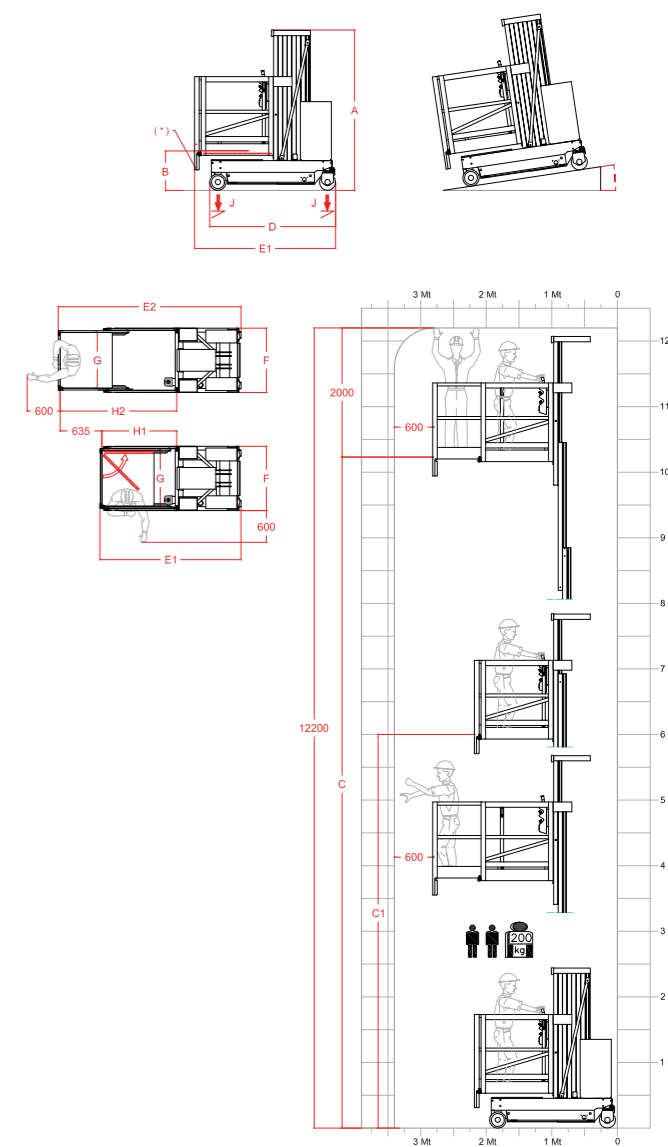

* THERE IS AN INTERMEDIATE STEP
** INCLUSIVE OF EXTENSIBLE PICKER
*** MAXIMUM PRESSURE WHEREAS THE WEIGHT OF THE PLATFORM PLUS THE MAXIMUM LOAD ON THE BASKET ARE COMPLETELY DISTRIBUTED ON ONE SIDE OF THE PLATFORM (TOTALLY ASYMMETRIC LOAD)